


miniVNA - 211031_171026

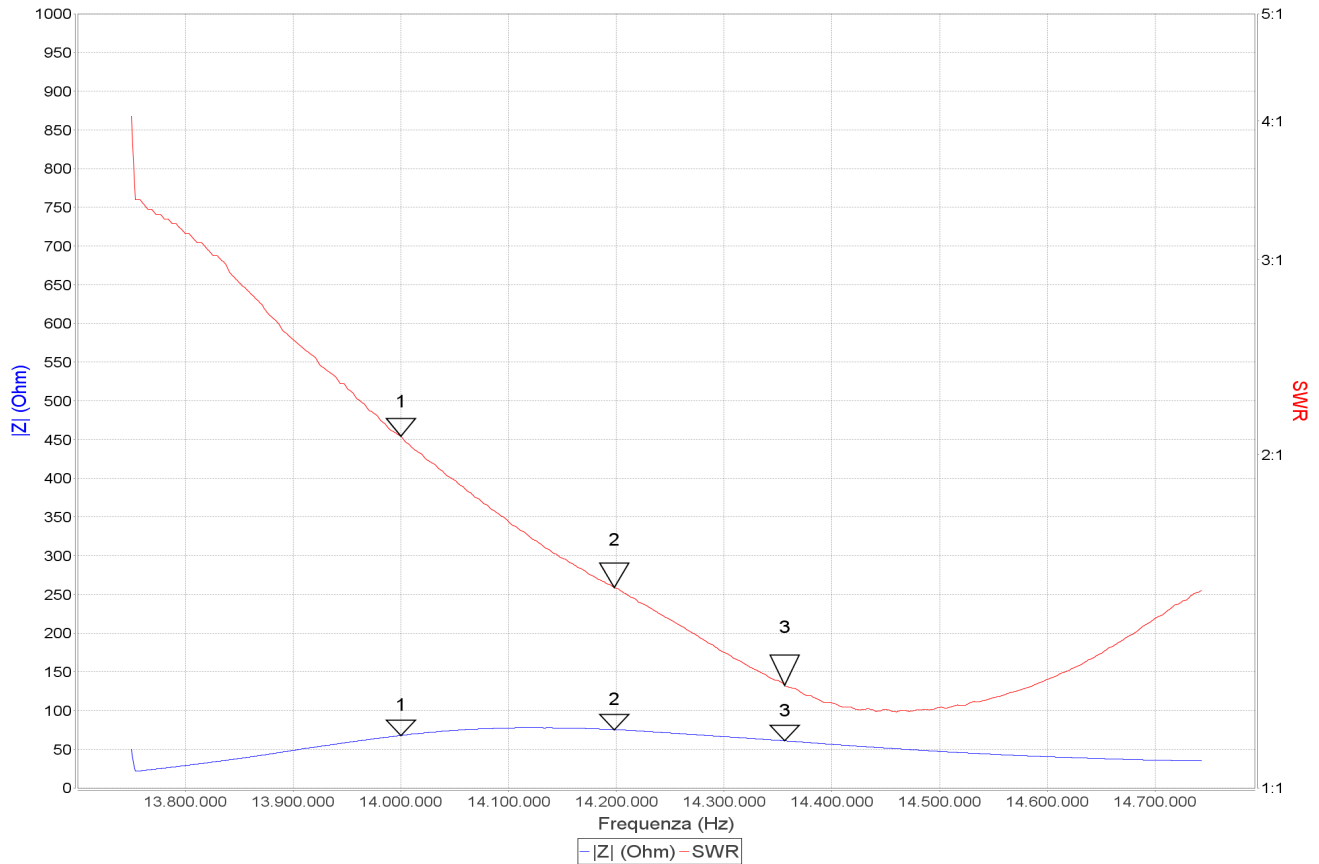

Marker	Frequenza	RL (dB)	RP (°)	Z ()	Rs ()	Xs ()	Theta	SWR
1	13.999.965	-9,12	61,91	67,7	55,3	38,9	35,1	2,08:1
2	14.198.046	-13,76	10,38	75,2	75,0	5,8	4,4	1,52:1
1-2	198.081	4,63	51,52	7,6	19,7	33,1	0,0	---
3	14.356.251	-19,45	23,64	60,8	60,6	5,2	4,9	1,24:1

Commento:

Date: 31/10/21 17.10
 Mode: Reflection
 Analyser: miniVNA / mini radio solutions - miniVNA
 Scan
 Start: 13750000 / 13.750.000
 Stop: 14748816 / 14.748.816
 Samples: 1568
 Overscan: ?
 Calibration
 Samples: 3000
 Overscan: 0
 File: REFL_miniVNA.cal
 User: PC
 Headline: {2} - {0,date,yyMMdd}_{0,time,HHmmss}
 Port extension len: <not set>m

Port extension vf: <not set>