


miniVNA - 211031_171211

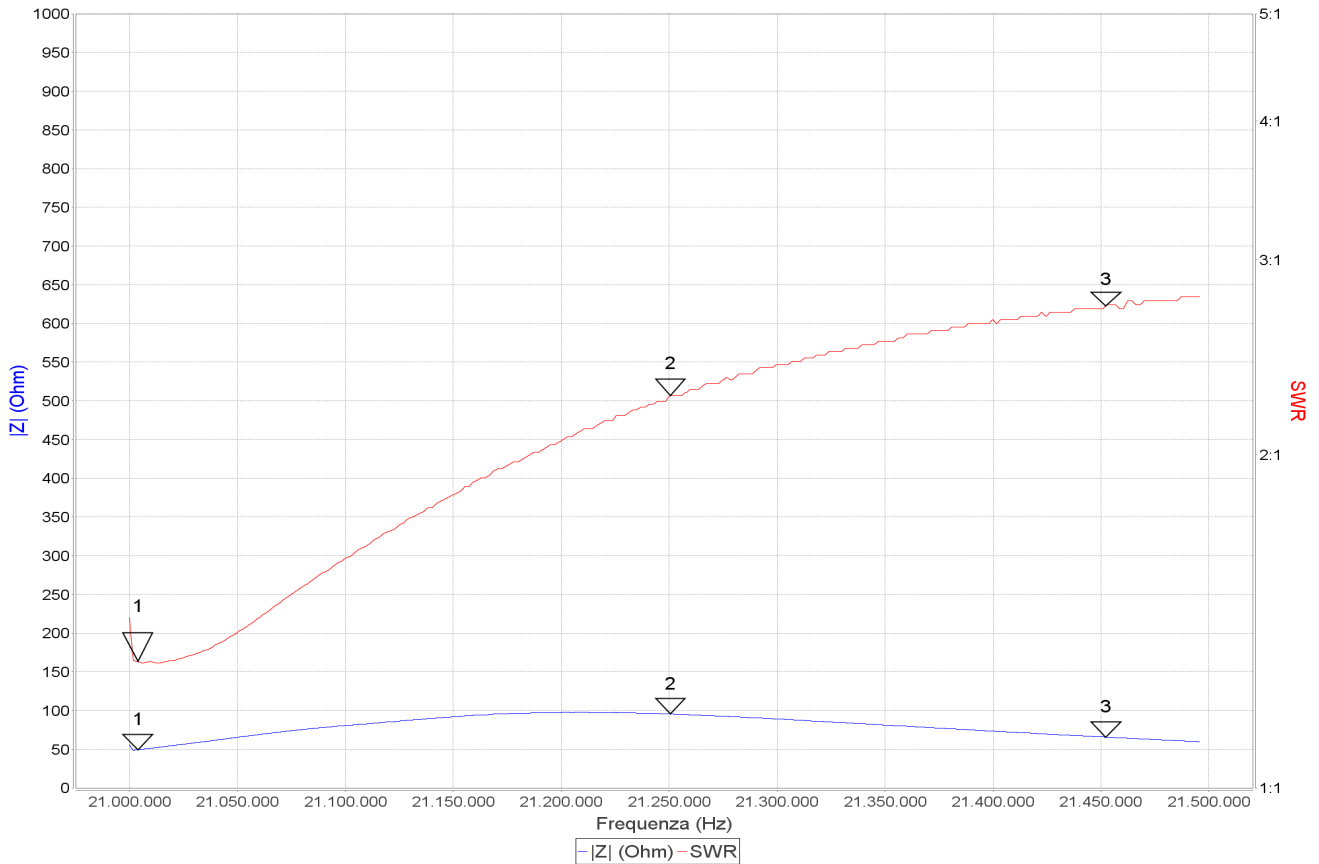

Marker	Frequenza	RL (dB)	RP (°)	Z ()	Rs ()	Xs ()	Theta	SWR
1	21.003.790	-17,68	93,26	49,3	47,6	12,6	14,9	1,30:1
2	21.250.455	-8,25	31,94	95,7	86,2	41,5	25,7	2,26:1
1-2	246.665	9,42	61,32	46,4	38,6	28,8	0,0	---
3	21.452.270	-6,69	69,58	65,7	44,1	48,7	47,8	2,72:1

Commento:

Date: 31/10/21 17.12
 Mode: Reflection
 Analyser: miniVNA / mini radio solutions - miniVNA
 Scan
 Start: 21000000 / 21.000.000
 Stop: 21498624 / 21.498.624
 Samples: 1568
 Overscan: ?
 Calibration
 Samples: 3000
 Overscan: 0
 File: REFL_miniVNA.cal
 User: PC
 Headline: {2} - {0,date,yyMMdd}_{0,time,HHmmss}
 Port extension len: <not set>m

Port extension vf: <not set>