


miniVNA - 211104_200233

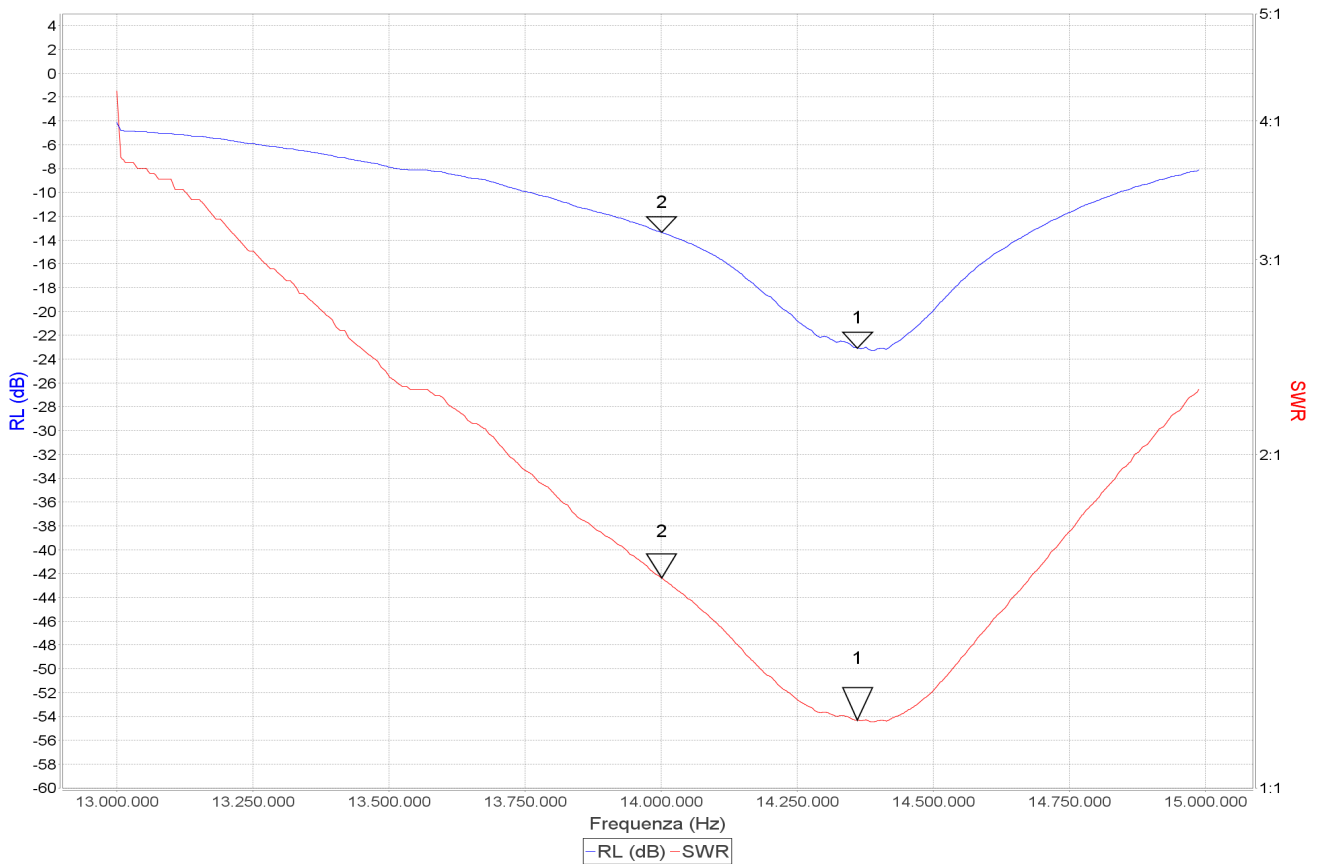

Marker	Frequenza	RL (dB)	RP (°)	Z (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	14.360.579	-23,06	92,73	49,7	49,2	6,9	8,0	1,15:1
2	14.000.795	-13,37	24,22	74,1	72,9	13,5	10,5	1,55:1
1-2	359.784	9,70	68,51	24,4	23,7	6,5	0,0	---

Commento:

Date: 04/11/21 20.02
 Mode: Reflection
 Analyser: miniVNA / mini radio solutions - miniVNA
 Scan
 Start: 13000000 / 13.000.000
 Stop: 14999200 / 14.999.200
 Samples: 1568
 Overscan: ?
 Calibration
 Samples: 3000
 Overscan: 0
 File: REFL_miniVNA.cal
 User: PC
 Headline: {2} - {0,date,yyMMdd}_{0,time,HHmmss}
 Port extension len: <not set>m
 Port extension vf: <not set>

