


miniVNA - 211104_200636

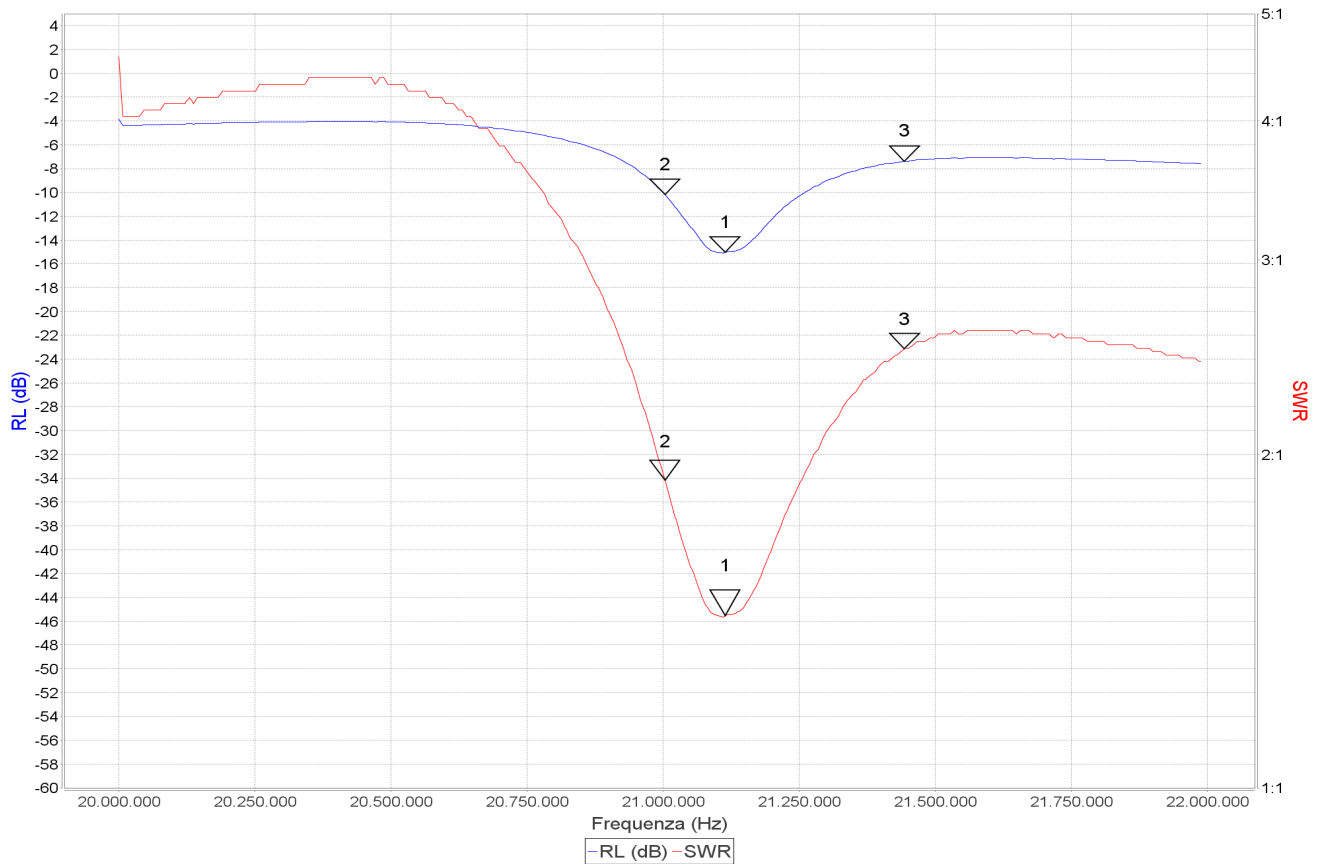

Marker	Frequenza	RL (dB)	RP (°)	Z (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	21.113.544	-15,04	101,61	46,7	43,9	15,7	19,7	1,43:1
2	21.003.332	-10,19	158,01	27,9	27,1	6,9	14,4	1,90:1
1-2	110.212	4,86	56,39	18,7	16,9	8,8	0,0	---
3	21.442.919	-7,39	46,51	86,3	68,8	52,2	37,2	2,49:1

Commento:

Date: 04/11/21 20.06
 Mode: Reflection
 Analyser: miniVNA / mini radio solutions - miniVNA
 Scan
 Start: 20000000 / 20.000.000
 Stop: 21999200 / 21.999.200
 Samples: 1568
 Overscan: ?
 Calibration
 Samples: 3000
 Overscan: 0
 File: REFL_miniVNA.cal
 User: PC
 Headline: {2} - {0,date,yyMMdd}_{0,time,HHmmss}
 Port extension len: <not set>m

Port extension vf: <not set>