


Testexport

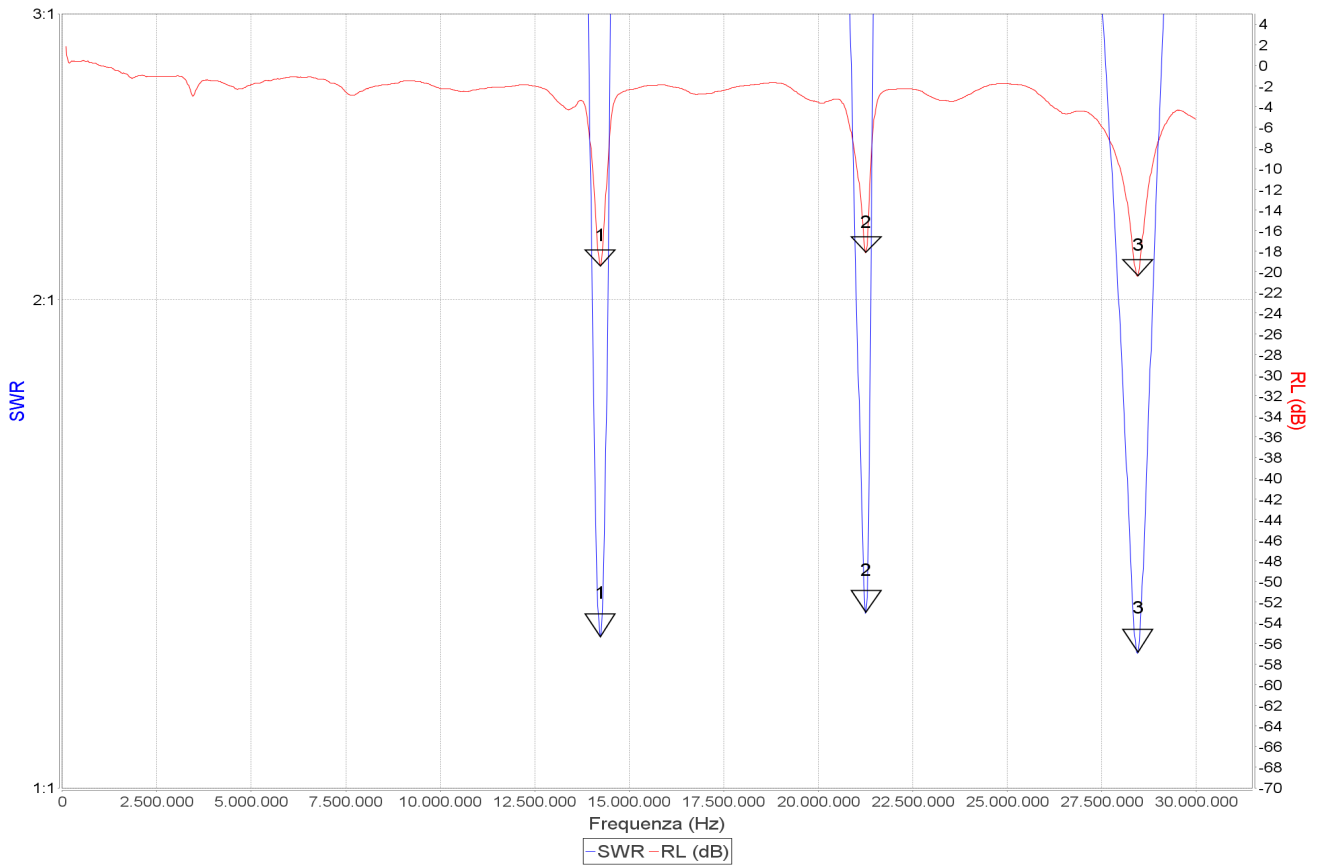

Marker	Frequenza	RL (dB)	RP (°)	Z (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	14.229.388	-19,41	139,88	42,5	42,1	5,9	7,9	1,24:1
2	21.265.480	-18,12	38,18	60,7	60,0	9,4	8,9	1,28:1
1-2	7.036.092	1,29	101,70	18,3	18,0	3,5	0,0	---
3	28.454.116	-20,35	154,66	42,0	41,9	3,5	4,7	1,21:1

Commento:

Date: 06/06/18 19.58
 Mode: Reflection
 Analyser: miniVNA / mini radio solutions - miniVNA
 Scan
 Start: 100000 / 100.000
 Stop: 29998624 / 29.998.624
 Samples: 1568
 Overscan: ?
 Calibration
 Samples: 2000
 Overscan: 0
 File: ---
 User: Administrator
 Headline: Testexport
 Port extension len: <not set>m

Port extension vf: <not set>